TRIM TAB ACTUATOR MOUNTING DIMENSTIONS

Standard Actuator
2¼" (57mm) full stroke

11 7/8"
(302 mm)
Varies
w/Transom
Angle

(Low Profile
Bracket)
10 7/8"
(276 mm)
Varies
w/Transom
Angle

Transom

34°
Typical

11 9/16"
(294mm)

Diameter
= 2.50"
(63mm)

Boat Bottom

1/4" Minimum
(6mm)

7¾" (197mm) typ.

Transom Mounting

13 5/8"
(346 mm)
Varies
w/Transom
Angle

(Low Profile
Bracket)
12 5/8"
(321 mm)
Varies
w/Transom
Angle

Transom

11 9/16"
(294mm)

Boat Bottom

Hinge 1/2" (13mm) Approx.

1/4" (6mm)
Minimum

Under Hull Pocket Mounting
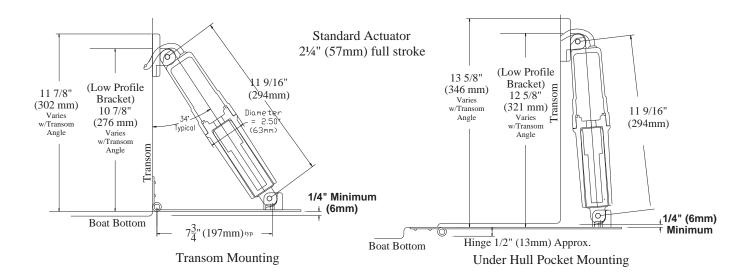
Model	DC Voltage	Stroke Length	Stroke Speed	Distance from Bolt to Pin	Vertical Height (Typical Installation Fully Retracted)	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket	Use Actuator w/ Tabs
FFS	24VDC	2.25"/57mm	8 sec.	11.5"/292mm	11.875"/302mm	13'/4m	None	None	All Tabs