



Utilite



**General Description**

Aesthetic Wall / Ceiling-Mounted luminaire suitable for 1 x PL-S 9W/11W Compact Fluorescent Lamp

**Features**

- Low-loss O.C. Copper Ballast, specially impregnated for longer life
- End caps, engineered to match the profile of the lamp and luminaire housing adding aesthetic appeal, made of ABS (available in colours)
- UV, stabilised prismatic SAN diffuser for protection & elimination of lamp glare
- Metallic channel colour options
- White reflector base for higher light delivery
- Pre-phosphated & powder-coated CRCA steel channel complete with all electrical accessories like copper ballast, lampholder all pre-wired upto a terminal block

**Applications**


- Shops
- Office interiors
- Corridors
- Utility areas
- Dressing tables

**Installation**


- Designed for surface mounting, this luminaire can be fixed on the wall by means of holes provided on the channel

**Compliance**

- Tested as per IEC 598 / IS 10322



Dimensions (mm)

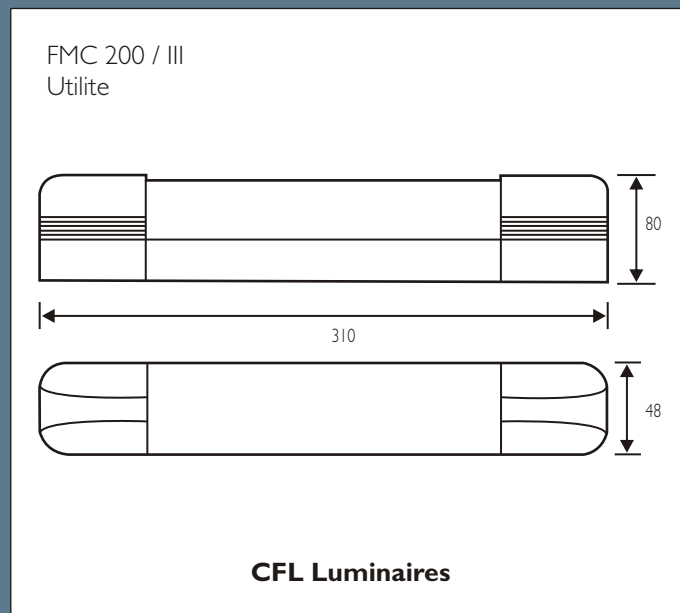

FMC 200 / III  
Utilite

FMC 200 / III  
Utilite

**Technical Data**

| Type        | For Lamp        | Nominal Voltage (V) | Mains Current (A) | Nominal Power Factor |
|-------------|-----------------|---------------------|-------------------|----------------------|
| FMS 200/III | 1 X PL-S 9W/11W | 240                 | 0.155             | 0.45                 |

**Ordering Data**

| Type                | Ordering No | Quantity per box | Dimensions (mm) | Net Weight (kg) | Gross Weight (kg) | Volume (m <sup>3</sup> ) |
|---------------------|-------------|------------------|-----------------|-----------------|-------------------|--------------------------|
| FMS 200/III (White) | 1321 11735  | 10               | 380 X 190 X 290 | 0.60 X 10       | 7.20              | 0.021                    |

