


Safety Lockout Valve V18 / V28

 = "Most Popular"



V18-02-0000
Left to Right Flow
(Orange Slide)

Features

The V18 / V28 safety lockout valve is a manually operated, slide-type, 2-position, 3-way valve. In the closed position, downstream air is exhausted to atmosphere. The valve slide can be locked in the closed position with a customer supplied padlock. The V18 / V28 safety lockout valves conform to OSHA #29 CFR part 1910 – control of hazardous energy source (lockout / tagout).

Specifications

Flow Capacity*	V18	1/4	141 SCFM (66.5 dm ³ /s)
		3/8	216 SCFM (101.9 dm ³ /s)
		1/2	272 SCFM (128.4 dm ³ /s)
	V28	3/8	208 SCFM (98.2 dm ³ /s)
		1/2	290 SCFM (136.9 dm ³ /s)
		3/4	300 SCFM (141.6 dm ³ /s)
Exhaust Flow	V18	3/8	C _v = 1.03
	V28	1/2	C _v = 1.05
Maximum Supply Pressure	150 PSIG (10.3 bar)		
Operating Temperature	32° to 150°F (0° to 65.5°C)		
Port Size	NPT / BSPP-G	V18	1/4, 3/8, 1/2
		V28	3/8, 1/2, 3/4
Weight	lb. (kg)	V18	.74 (.34)
		V28	.90 (.41)


* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

Materials of Construction

Blade	Acetal
Body	Zinc
Seals	Nitrile

Replacement Kits







- Plastic Slide And O-rings, (Orange) (V18) VRP-96-925
- Plastic Slide And O-rings, (Orange) (V28) VRP-96-926

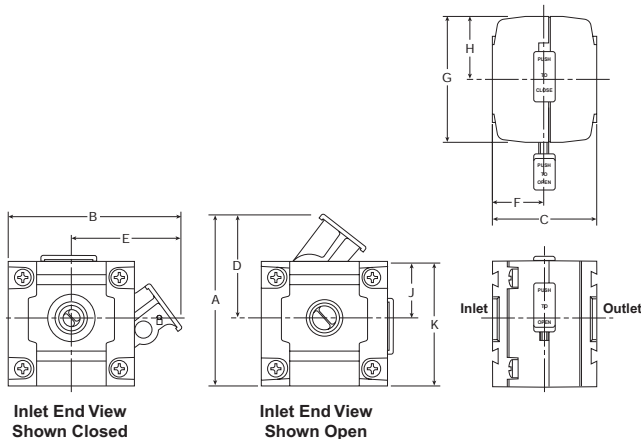

Dimensions

Models	Inches (mm)	A	B	C	D	E	F	G	H	J	K
Standard Unit V18-XX-0000		3.16 (80)	3.19 (81)	1.93 (49)	1.91 (48.5)	2.02 (51)	0.97 (24.5)	2.36 (60)	1.18 (30)	1.03 (26)	2.28 (58)
Standard Unit V28-XX-0000		3.23 (82)	3.41 (86)	2.28 (58)	1.98 (50)	2.13 (54)	1.14 (28)	2.58 (65)	1.29 (33)	1.03 (26)	2.28 (58)

= "Most Popular"

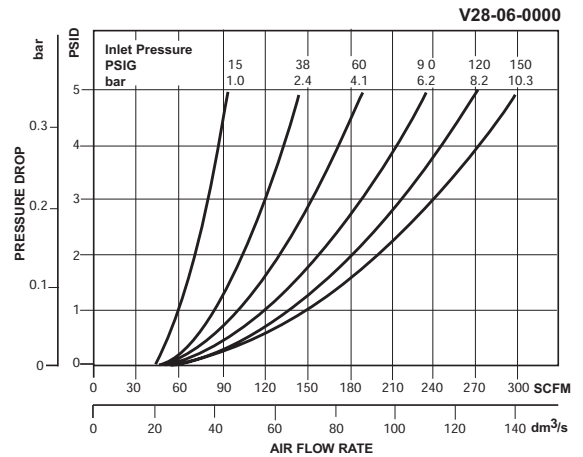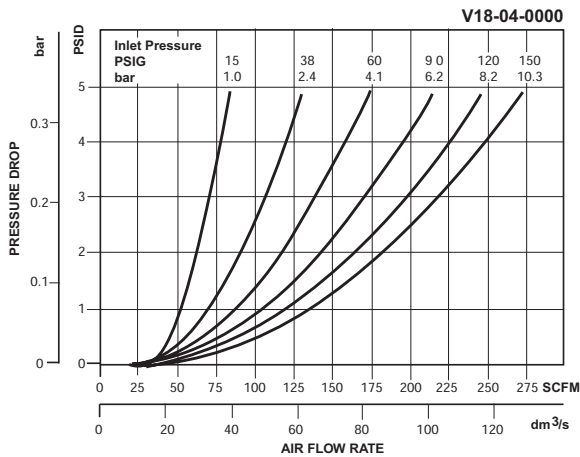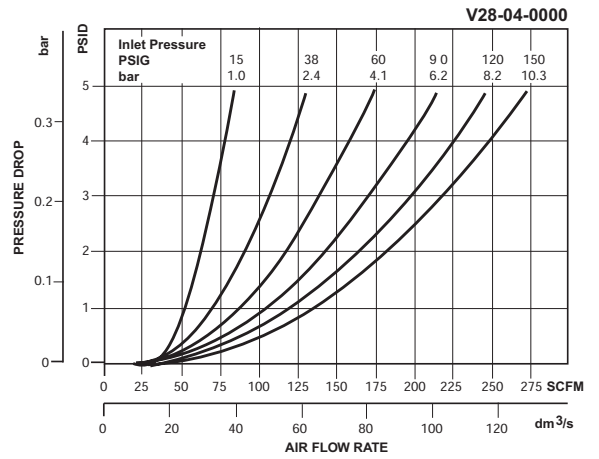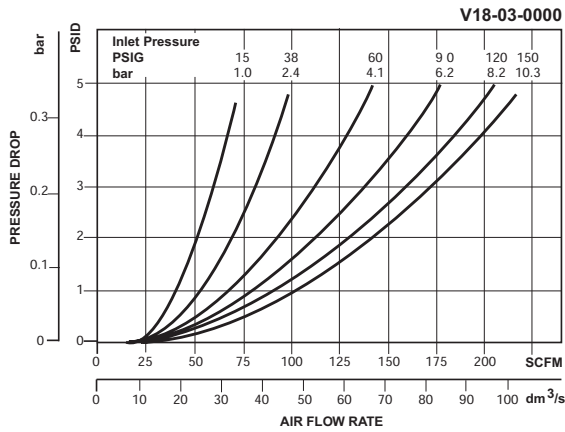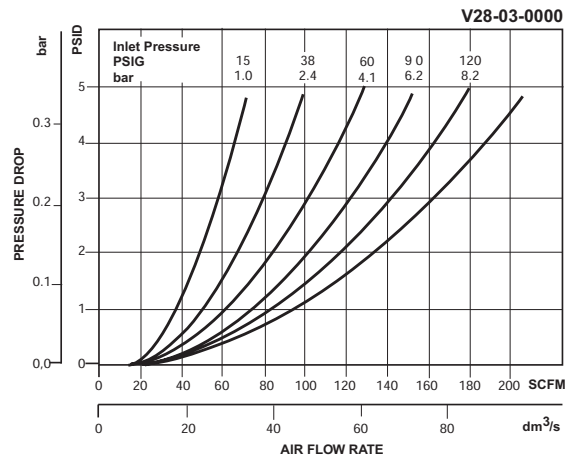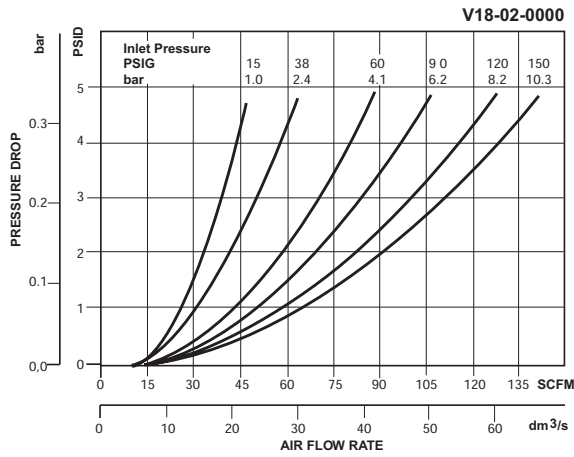

Ordering Information

Model Type	Port Size	Safety Lockout Valve
V18	1/4	V18-02-0000
	3/8	V18-03-0000
	1/2	V18-04-0000
V28	3/8	V28-03-0000
	1/2	V28-04-0000
	3/4	V28-06-0000

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

